

# Technical Specification for SR700-D (Dual Module Dual SIM 4G Router)



VERSION NUMBER: **V2.3**

XIAMEN KEY-IOT TECHNOLOGY CO., LTD  
[www.key-iot.com](http://www.key-iot.com)




# Product Overview

The SR700-D series products are IoT wireless router products integrating 4G/5G networks, virtual private networks, and other technologies. With the 4G/5G wireless wide area network and Wi-Fi wireless local area network technologies, this device provides uninterrupted access to various networks. With its comprehensive security and wireless services, it offers users a high-speed and stable data transmission channel.

## Product Features

- Supports dual mode dual SIM network backup
- Supports WLAN (optional)
- Supports 5 Ethernet ports
- Supports wired and wireless backup
- Supports rail and desktop installation
- Supports efficient completion of large-scale device network deployment
- Industrialized design, capable of withstanding challenging conditions
- Supports 4G LTE CAT4 high-speed network, optional 1.8GHz private network
- Supports Linux OpenWrt system, facilitating user secondary development, and providing comprehensive secondary development guidelines
- Supports various VPN functions: PPTP, L2TP, IPSEC, OPENVPN, GRE, GRE-TAP, Vxlan, etc
- Supports SNMP and StarLink STAR DEVICE MANAGER StarCloud platform, enabling efficient remote centralized network management

# Topology Diagram

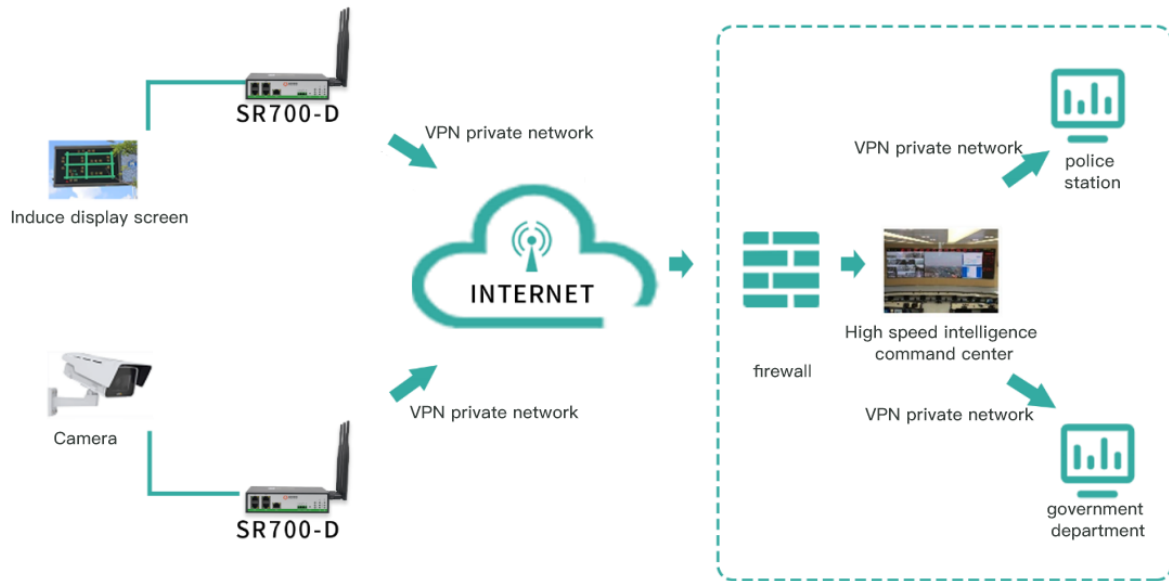

# Technical Parameters

## Hardware Performance

Memory	256MB
FLASH	32MB
WIFI (optional)	2.4G supports 802.11b/g/n, with a maximum speed of 300Mbps
Network support	Dual industrial-grade 4G modules, supporting seven-mode networks
System time	Time synchronization using NTP technology, with built-in RTC


## Interfaces

WAN port	1 WAN port
LAN port	4 ports (10M/100M/1000M adaptive MDI/MDIX port)
SIM card interface	2 slots (drawer-type card slot, supporting 1.8V/3V SIM/UIM cards)
Reset	1 (reset button)
Antenna interface	4 ports (4G antenna, 50-ohm impedance, SMA female inner hole interface) 2 ports (2.4G antenna, 50-ohm impedance, SMA inner pin interface)
Power terminal	1 terminal (2-pin 3.81mm pitch connector)
Console port	1 RS232, 1 RS485

Indicators	9 (1 PWR indicator, 1 SYS indicator, 3 signal strength indicators, sim1, sim2, 1 WiFi indicator, 1 NET indicator)
<b>Power</b>	
Characteristics Power	External power adapter (12V 1A)
Operating voltage	Wide power input DC 5~36V (expandable 5-60V)
Standby power consumption	150~230mA@12V DC
Operating power consumption	250~310mA@12V DC
<b>Operating conditions</b>	
Operating temperature	-35~+75°C (-31~+167°F)
Storage temperature	-40~+85°C (-40~+185°F)
Operating humidity	5%~95% (non-condensing)
Device ventilation	Natural heat dissipation ,no noise
<b>Physical Characteristics</b>	
Enclosure	Full metal enclosure
Dimensions	Length*width*height 126*44*126mm (excluding antenna and installation accessories)
Installation method	Desktop placement, rail installation, wall mounting
Weight	Net weight: 0.67KG (excluding antenna and installation accessories)
	Gross weight: 0.95KG (with accessories and packaging box)
<b>Device Safety and Reliability</b>	
Safety and Reliability	Reverse polarity protection, overvoltage protection, overcurrent protection; Ethernet interface built-in 1.5KV electromagnetic isolation protection; RS232/RS485 interface built-in 15KV ESD protection; SIM/UIM card interface built-in 15KV ESD protection
Protection level	IP30
Certification	Compliant with CCC, RoHS
MTBF	≥ 100,000 hours
<b>Software Features</b>	
Network access	Supports APN VPDN
Access authentication	Supports CHAP/PAP authentication
Network mode	GSM/GPRS/EDGE, LIMTS/HSPA+/EVDO/TD-SCDMA/TD-LTE/FDD LTE
LAN protocol	Supports ARP, Ethernet
WAN protocol	Supports static IP, DHCP, PPPoE, PPP
IP applications	Supports Ping, Trace, DHCP Server, DHCP Relay, DHCP Client, DNS relay, DDNS, Telnet
IP routing	Supports routing
NAT function	Supports network address translation
Industrial protocols	Supports environmental protection 212 protocol, supports MQTT, MUDBUS, and other industrial protocols
<b>Network Security</b>	

Firewall	Full state packet inspection (SPI), prevention of denial of service (Dos) attacks, filtering of multicast Ping packets, access control lists (ACLs), content URL filtering, port mapping, virtual IP mapping, IP-MAC binding
Data Security	IPsec VPN/L2TP/PPTP/GRE/OPEN VPN/CA certificate
<b>Reliability</b>	
Backup function	Supports wired, dual 4G, and Wi-Fi backup
Link online monitoring	Sends heartbeat packets for detection and automatically reconnects when disconnected
Embedded watchdog	Equipment runs self-checking technology, and equipment automatically repairs faults
<b>WLAN (optional).</b>	
Protocol Standards	IEEE 802.11b/g/n
Speed	Supports 300Mbps
Security features	Open system, shared key, WPA/WPA2 authentication, WEP/TKIP/AES encryption
Operating mode	AP, Client mode
Transmission distance	100m (actual transmission distance depends on the environment)
<b>Intelligence</b>	
Integrated DTU function	Supports TCP, UDP transparent transmission mode, TCP Server mode, supports Modbus RTU to Modbus TCP bridge, supports DCUDP, DCTCP mode
<b>Network Management</b>	
QoS management	Supports bandwidth limitation, IP speed limit
Configuration method	Supports telnet, web, ssh, and console configuration methods
Upgrade method	Supports web upgrade, supports FOTA
Log function	Supports local system logs, remote logs, serial port output logs
Network management function	Supports StarLink STAR Device Manager platform, batch management
Simple network management function	Supports SNMP v1/v2/v3, supports SNMP TRAP function
Traffic management	Supports traffic threshold setting, supports traffic statistics and traffic alarm function
Maintenance tools	Ping, route tracing
Status query	System status, modem status, network connection status, route status

# Product Interfaces

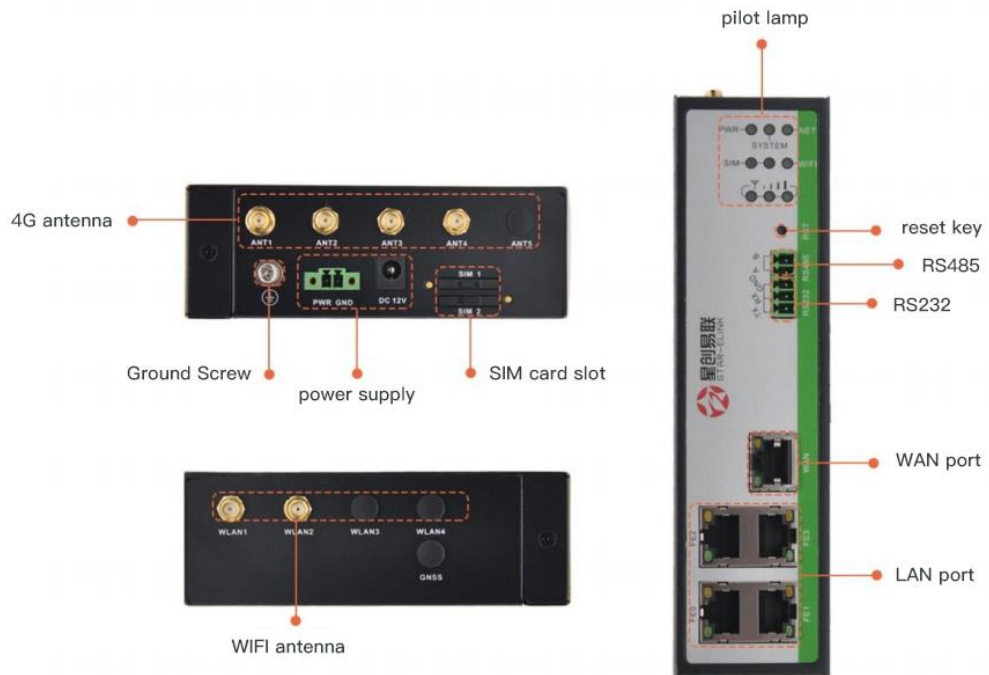

# Product Dimensions

单位:mm  
unit:mm

